APOLLO TOTAL

Features:

Black PVC-NBR hose, reinforced with a green anti-shock rigid PVC spiral.

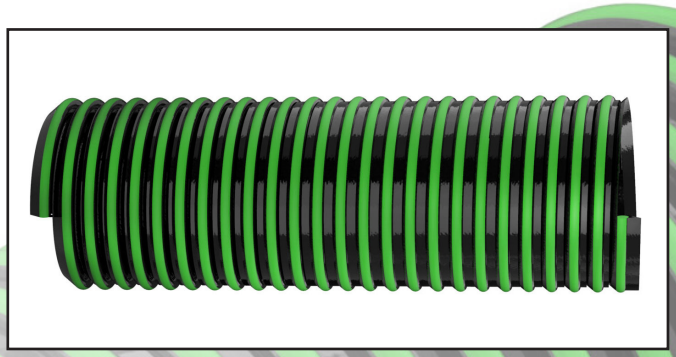

Its particular mixed rubber nitrylic formulation gives it a high flexibility at extreme low temperatures, making it the lightest and most flexible product of Apollo series. Its profile, with a slightly protruding spiral, guarantees an easy dragging on the ground and an easy and safe connection.

Color: black with green spiral

Working Temperature: - 40°C + 50°C

Applicazione

Wastewater treatment: suction and delivery of liquids and waste water in general; ideal to be used on tank trucks, even at extremely low temperatures.

Part Number	DN (mm)	S. (mm)	Weight (g/m)	P. E. (bar)	P.S. (bar)	R. C. (mm)	D. (m H_2O)	L. R. (m)
20310.80-30	80	4,0 - 5,6	1700	2,5	7,5	225	9	30
20310.80-50	80	4,0 - 5,6	1700	2,5	7,5	225	9	50
20310.100-30	102	4,8 - 7,5	2600	2,2	6,5	300	9	30

Legend

- **S.**: Thickness
- **P. E.**: Working Pressure
- **P. S.**: Bursting Pressure
- **R. C.**: Bending Radius
- **D.**: Vacuum
- **L. R.**: Coil Length (other sizes might possibly available)