WAMAX

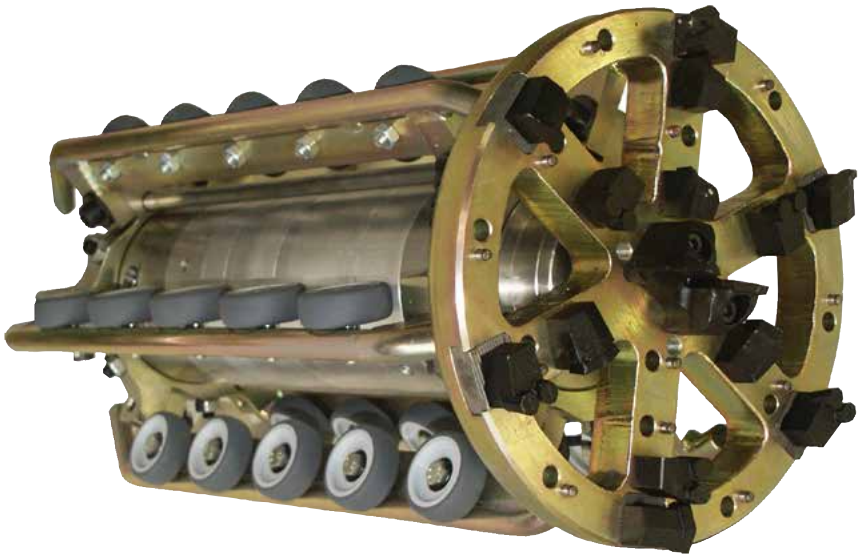

The **WAMAX hydraulic milling head** is particularly suitable for concrete and root obstruction removal and for the preparation of rehabilitation jobs.
Depending on the request several tools are available (carbide theeth, knives, saws, ..) and can be installed on the milling head.
The head rotation power is given by a turbine that absorbs 10% of the total flow.
The residual flow provides the thrust required to proceed within the pipe and the impact of the milling head.
WAMAX 100 is delivered with a set of guides, heads and accessories that can be applied from DN 100 up to DN 200 mm.
WAMAX 200 and **300** are configured upon request.

	WAMAX 100	WAMAX 200	WAMAX 300
	1" F	1" ¼ F	1" ¼ F
Ø x L (mm)	75 x 240	125 x 460	150 x 500
Weight (kg)	7.9	27	40
Jet Angle	15°	15°	15°
Inserts	4 x M12 C	8 x TE ¼ C	8 x TE ¼ C
Working DN (mm)	100-200	150-500	300-800
Part numbers	***77100.00***	***77200.00***	***77300.00***

Minimum flow according to working DN (lt/min)

	DN							
	100	150	200	300	400	500	600	800
WAMAX 100	> 75	> 75	> 75					
WAMAX 200	> 240	> 240	> 240	> 290	> 290			
WAMAX 300				> 265	> 265	> 290	> 295	> 390

Tools and theet for milling head